

An ultra-weak three-field finite element formulation for the biharmonic and extended Fisher–Kolmogorov equations

Rekha Khot, Bishnu P. Lamichhane, and Ricardo Ruiz-Baier

Abstract This paper discusses a so-called ultra-weak three-field formulation of the biharmonic problem where the solution, its gradient, and an additional Lagrange multiplier are the three unknowns. We establish the well-posedness of the problem using the abstract theory for saddle-point problems, and develop a conforming finite element scheme based on Raviart–Thomas discretisations of the two auxiliary variables. The well-posedness of the discrete formulation and the corresponding a priori error estimate are proved using a discrete inf-sup condition. We further extend the analysis to the time-dependent semilinear equation, namely extended Fisher–Kolmogorov equation. We present a few numerical examples to demonstrate the performance of our approach.

Key words: Mixed finite element methods, biharmonic problem, extended Fisher–Kolmogorov equation, Raviart–Thomas finite element.

AMS Subject Classifications: 65N30, 65N15.

Rekha Khot

Department of Mathematics, Indian Institute of Technology Palakkad, Kanjikode, Palakkad, Kerala 678623, India, e-mail: RekhaKhot@iitpkd.ac.in

Bishnu P. Lamichhane

School of Mathematical & Physical Sciences, University of Newcastle, University Drive, Callaghan, NSW 2308, Australia, e-mail: Bishnu.Lamichhane@newcastle.edu.au

Ricardo Ruiz-Baier

School of Mathematics, Monash University, 9 Rainforest Walk, Melbourne 3800 VIC, Australia, and Universidad Adventista de Chile, Casilla 7-D, Chillán, Chile, e-mail: Ricardo.RuizBaier@monash.edu

1 Introduction

Fourth-order partial differential equations appear in many applications. Some examples are thin beams and plates, strain gradient elasticity [10, 15], the Stokes problem [19] and phase separation of a binary mixture [32]. The variational formulation of these problems requires H^2 -conforming finite elements, which are not so easy to construct on unstructured meshes. There are a few classical approaches to avoid this difficulty. The first one is to use discontinuous Galerkin methods or non-conforming approaches as in [27, 15, 7, 32]. The non-conforming approach based on Morley finite element is quite efficient but it does not produce a *uniform* approximation when applied to a singularly perturbed problem [25, 31]. This is due to the fact that Morley finite element diverges for a second order problem and the singularly perturbed problem degenerates to a second order problem in a limit. The second approach is to apply a mixed formulation as in [12, 11, 16, 10, 17, 2, 26, 13, 18].

This paper is concerned with a mixed formulation of the biharmonic equation and its finite element discretisation. As in [20, 9, 23, 3], our formulation is based on using the gradient of the solution as a new variable. We formulate our problem as minimising the square of the L^2 -norm of the divergence of the gradient in a suitable Hilbert space as in [3]. Then we write a variational equation of the constraint using a Lagrange multiplier. However, in contrast to [3], we reformulate the constraint using an integration by parts to recast the problem with the solution in the L^2 -space. Therefore, we call our formulation *ultra-weak*. The gradient of the solution and the Lagrange multiplier both are discretised using a Raviart–Thomas finite element space. We note that a similar formulation has been introduced in [28] for the Poisson equation, and in [18] for the biharmonic problem. Here we also carry out the error analysis for the extended Fisher–Kolmogorov (EFK) equation, which is a time-dependent semilinear fourth-order equation with a parameter that multiplies the biharmonic term and thus controls the strength of higher-order diffusion/curvature penalty.

The contents of the paper have been organised as follows. Section 2 describes the strong form of the biharmonic problem with different boundary conditions and shows a derivation of the proposed ultra-weak formulation. In Section 3, we address the unique solvability of the problem using the Babuška–Brezzi theory for saddle-point problems. We introduce the discrete problem in Section 4, show discrete well-posedness, and establish quasi-optimality results, which for Raviart–Thomas finite elements imply optimal convergence rates. Then, we extend the approach to the extended Fisher–Kolmogorov equation in Section 5, prove a stability estimate and show the convergence of the numerical method. Finally, Section 6 presents numerical examples in 2D and 3D illustrating the properties of the proposed three-field formulation, and focusing on the extended Fisher–Kolmogorov problem. We also present a brief parametric study with the performance of the mixed finite element scheme when varying the curvature coefficient.

2 A mixed formulation for the biharmonic equation

In this section we discuss a new mixed formulation of the biharmonic problem. Let $\Omega \subset \mathbb{R}^d$, $d \in \{2, 3\}$, be a bounded convex domain with polygonal or polyhedral boundary $\Gamma = \partial\Omega$ and a unit normal n pointing outward to Γ . We consider the biharmonic equation

$$\Delta^2 u = f \quad \text{in } \Omega \quad (1)$$

with either simply supported boundary conditions

$$u = \Delta u = 0 \quad \text{on } \Gamma, \quad (2)$$

or with Cahn–Hilliard boundary conditions

$$\frac{\partial u}{\partial n} = \frac{\partial \Delta u}{\partial n} = 0 \quad \text{on } \Gamma. \quad (3)$$

Here we consider a new mixed formulation of the biharmonic equation and its finite element discretisation. We aim to derive an ultra-weak formulation, where the solution u is only square integrable. There are many mixed schemes for the biharmonic problem [12, 11, 10, 20, 9, 22, 23]. Our formulation is similar to a formulation proposed in a recent contribution [18], where the solution u belongs to $L^2(\Omega)$. In this article, we derive a unified formulation for simply supported (2) and Cahn–Hilliard (3) boundary conditions (BCs), and extend the analysis to the extended Fisher–Kolmogorov equation.

Here we start with a minimisation problem for the biharmonic equation and introduce the gradient as a new unknown as in [12, 20, 9, 22, 23]. Then we write a variational equation of this new equation using a Lagrange multiplier.

We use the Sobolev spaces $L^2(\Omega)$, $H^s(\Omega)$ for $s \in \mathbb{R}$ and $H(\text{div}, \Omega)$, which are defined in a standard way, equipped with their usual inner products and norms [24, 1, 10, 6]. Defining

$$V := \begin{cases} H^2(\Omega) \cap H_0^1(\Omega) & \text{for simply supported BCs,} \\ \{v \in H^2(\Omega) : \partial v / \partial n = 0 \text{ on } \Gamma, \int_{\Omega} v = 0\} & \text{for Cahn–Hilliard BCs,} \end{cases}$$

we consider the following variational form of the biharmonic problem (1)

$$J(u) = \inf_{v \in V} J(v), \quad (4)$$

with

$$J(v) := \frac{1}{2} \int_{\Omega} |\Delta v|^2 \, dx - \ell(v), \quad \ell(v) := \int_{\Omega} f v \, dx. \quad (5)$$

The minimisation problem associated with (5) is equivalent to finding $u \in V$ such that

$$A(u, v) = \ell(v) \quad \forall v \in V, \quad (6)$$

where

$$A(u, v) := \int_{\Omega} \Delta u \Delta v \, dx.$$

The existence and uniqueness of the solution of (4) and (6) are well established [12, 10, 13].

We need the following two Hilbert spaces to define our new mixed formulation. Let

$$W := \begin{cases} H_0^1(\Omega) & \text{for simply supported BCs,} \\ \{v \in H^1(\Omega) : \int_{\Omega} v \, dx = 0\} & \text{for Cahn-Hilliard BCs,} \end{cases}$$

and

$$\mathbf{M} := \begin{cases} H(\operatorname{div}, \Omega) & \text{for simply supported BCs,} \\ H_0(\operatorname{div}, \Omega) & \text{for Cahn-Hilliard BCs,} \end{cases}$$

where

$$H_0(\operatorname{div}, \Omega) := \{\tau \in H(\operatorname{div}, \Omega) : \tau \cdot n = 0 \text{ on } \Gamma\}.$$

Introducing the new variable $\sigma := \nabla u$ (as in the Ciarlet–Raviart formulation, σ represents the velocity of the flow in the context of Stokes equations, or the rotation vector in the case of plate equations), the biharmonic problem is now recast as a constrained minimisation problem [3, 10, 12]

$$\arg \min_{\substack{(u, \sigma) \in [W \times \mathbf{M}] \\ \sigma = \nabla u}} \left(\frac{1}{2} \|\operatorname{div} \sigma\|_{L^2(\Omega)}^2 - \ell(u) \right).$$

Remark 1. The spaces W and $\mathbf{M}$ are defined in such a way that we get the correct boundary conditions from this minimisation formulation for both types of boundary conditions.

To arrive at an ultra-weak formulation, we multiply the constraint $\sigma = \nabla u$ by a Lagrange multiplier $\psi \in \mathbf{M}$ and integrate by parts to get

$$\int_{\Omega} \sigma \cdot \psi \, dx + \int_{\Omega} u \operatorname{div} \psi \, dx = 0.$$

Let

$$U := \begin{cases} L^2(\Omega) & \text{for simply supported BCs,} \\ \{v \in L^2(\Omega) : \int_{\Omega} v \, dx = 0\} & \text{for Cahn-Hilliard BCs.} \end{cases}$$

Let $\mathbb{V} := U \times \mathbf{M}$. Here $\mathbb{V}$ is equipped with the standard graph norm:

$$\|(v, \tau)\|_{\mathbb{V}}^2 := \|v\|_{0, \Omega}^2 + \|\tau\|_{\operatorname{div}, \Omega}^2,$$

where $\|\tau\|_{\operatorname{div}, \Omega}^2 := \|\tau\|_{0, \Omega}^2 + \|\operatorname{div} \tau\|_{0, \Omega}^2$.

We now define the constrained space $\mathcal{V}$ as

$$\mathcal{V} := \{(v, \tau) \in \mathbb{V} : \int_{\Omega} \tau \cdot \psi \, dx + \int_{\Omega} v \operatorname{div} \psi \, dx = 0, \quad \forall \psi \in \mathbf{M}\}.$$

This leads to a minimisation problem of finding $(u, \sigma) \in \mathbb{V}$ such that

$$\mathcal{J}(u, \sigma) = \inf_{(v, \tau) \in \mathcal{V}} J(v, \tau), \quad (7)$$

with

$$J(v, \tau) := \frac{1}{2} \int_{\Omega} |\operatorname{div} \tau|^2 \, dx - \ell(v).$$

Remark 2. A similar three-field formulation has been proposed in [3], where the constraint is written as

$$\int_{\Omega} (\sigma - \nabla u) \cdot \psi \, dx = 0, \quad \forall \psi \in [L^2(\Omega)]^d,$$

and $u \in H_0^1(\Omega)$. In that case, a discrete Lagrange multiplier space should be chosen very carefully to ensure stability. Invoking an integration by parts and using the boundary condition, our new formulation requires the solution $u \in L^2(\Omega)$. Therefore, we name it an ultra-weak formulation.

Remark 3. If $u \in V$ is the solution to the minimisation problem (4), then $(u, \nabla u) \in \mathcal{V}$ is also the solution to the minimisation problem (7). Conversely, if $(u, \sigma) \in \mathcal{V}$ is the solution to the minimisation problem (7), we get

$$\int_{\Omega} \sigma \cdot \psi \, dx + \int_{\Omega} u \operatorname{div} \psi \, dx = 0, \quad \forall \psi \in \mathbf{M}.$$

If $u \in H^2(\Omega)$, an integration by parts leads to

$$\int_{\Omega} \sigma \cdot \psi \, dx - \int_{\Omega} \nabla u \cdot \psi \, dx + \int_{\Gamma} u \psi \cdot n \, d\sigma = 0, \quad \forall \psi \in \mathbf{M}.$$

In particular, choosing $\psi \in \mathbf{M}$ with $\psi \cdot n = 0$ on Γ produces $\sigma = \nabla u$ for both cases of boundary conditions. Using $\sigma = \nabla u$ and the fact that $\psi \in \mathbf{M}$, we get $u = 0$ on Γ for the case of simply supported boundary conditions. For the case of Cahn–Hilliard boundary conditions, as $\sigma \in \mathbf{M}$, we have $\sigma \cdot n = 0$ on Γ , which gives $\nabla u \cdot n = 0$ on Γ . Hence $u \in V$ for both types of boundary conditions, and u is the solution to the minimisation problem (4).

This leads to a saddle point problem of finding $((u, \sigma), \phi) \in \mathbb{V} \times \mathbf{M}$ such that

$$a((u, \sigma), (v, \tau)) + b((v, \tau), \phi) = \ell(v), \quad \forall (v, \tau) \in \mathbb{V}, \quad (8a)$$

$$b((u, \sigma), \psi) = 0 \quad \forall \psi \in \mathbf{M}, \quad (8b)$$

where bilinear forms $a(\cdot, \cdot)$ and $b(\cdot, \cdot)$ are given by

$$a((u, \sigma), (v, \tau)) := \int_{\Omega} \operatorname{div} \sigma \operatorname{div} \tau \, dx, \quad (9a)$$

$$b((v, \tau), \psi) := \int_{\Omega} \tau \cdot \psi + v \operatorname{div} \psi \, dx. \quad (9b)$$

Remark 4. If $u \in H^1(\Omega)$, the second equation of (8) yields $\sigma = \nabla u$. Using $v = 0$ in the first equation of (8) and integrating by parts, we see that $\phi = \nabla(\Delta u)$ if $u \in H^3(\Omega)$.

3 Stability analysis

In this section, we show the coercivity of the bilinear form $a(\cdot, \cdot)$ and inf-sup condition of the bilinear form $b(\cdot, \cdot)$ on the kernel space $\mathcal{V}$.

Lemma 1. *There exists a constant $C > 0$ such that for $(v, \tau) \in \mathcal{V}$*

$$a((v, \tau), (v, \tau)) \geq C \left(\|\tau\|_{\operatorname{div}, \Omega}^2 + \|v\|_{0, \Omega}^2 \right).$$

Proof. Let $(v, \tau) \in \mathcal{V}$. Notice from the definition (9a) of $a(\cdot, \cdot)$ that

$$a((v, \tau), (v, \tau)) = \|\operatorname{div} \tau\|_{0, \Omega}^2. \quad (10)$$

We aim to show that

$$\|v\|_{0, \Omega} \leq C \|\tau\|_{0, \Omega}, \quad \text{and} \quad \|\tau\|_{0, \Omega} \leq C \|\operatorname{div} \tau\|_{0, \Omega}.$$

Since $(v, \tau) \in \mathcal{V}$, we have

$$\int_{\Omega} \tau \cdot \psi + v \operatorname{div} \psi \, dx = 0, \quad \forall \psi \in \mathbf{M}. \quad (11)$$

We choose $\psi \in \mathbf{M}$ as a solution of the divergence equation [6, Lemma 11.2.3]

$$\operatorname{div} \psi = v$$

with the property

$$\|\psi\|_{0, \Omega} \leq C \|v\|_{0, \Omega}.$$

This in (11) and the Cauchy–Schwarz inequality lead to

$$\|v\|_{0, \Omega}^2 = - \int_{\Omega} \tau \cdot \psi \, dx \leq \|\tau\|_{0, \Omega} \|\psi\|_{0, \Omega} \leq C \|\tau\|_{0, \Omega} \|v\|_{0, \Omega}.$$

Thus, we have

$$\|v\|_{0, \Omega} \leq C \|\tau\|_{0, \Omega}. \quad (12)$$

For the second step, choosing $\psi = \tau$ in (11), we obtain

$$\|\tau\|_{0,\Omega}^2 = - \int_{\Omega} v \operatorname{div} \tau \, dx.$$

This followed by the Cauchy–Schwarz inequality and (12) proves that

$$\|\tau\|_{0,\Omega} \leq C \|\operatorname{div} \tau\|_{0,\Omega}. \quad (13)$$

The conclusion follows by using (10), (12) and (13).

Lemma 2. *The bilinear form $b(\cdot, \cdot)$ satisfies the inf-sup condition:*

$$\sup_{(v,\tau) \in \mathbb{V}} \frac{b((v,\tau), \psi)}{\|(v,\tau)\|_{\mathbb{V}}} \geq \frac{1}{\sqrt{2}} \|\psi\|_{\operatorname{div},\Omega}, \quad \forall \psi \in \mathbf{M}. \quad (14)$$

Hereafter, the supremum is taken over all functions of the underlying space with non-zero norm on the denominator.

Proof. Let $\psi \in \mathbf{M}$. Choosing $v = \operatorname{div} \psi$ and $\tau = \psi$, we have

$$\sup_{(v,\tau) \in \mathbb{V}} \frac{b((v,\tau), \psi)}{\|(v,\tau)\|_{\mathbb{V}}} = \frac{\|\psi\|_{0,\Omega}^2 + \|\operatorname{div} \psi\|_{0,\Omega}^2}{\sqrt{\|\operatorname{div} \psi\|_{0,\Omega}^2 + \|\psi\|_{\operatorname{div},\Omega}^2}} \geq \frac{1}{\sqrt{2}} \|\psi\|_{\operatorname{div},\Omega}.$$

This concludes the proof.

Remark 5. The biharmonic equation with clamped boundary conditions $u = \frac{\partial u}{\partial n} = 0$ on Γ corresponds to the saddle point problem of finding $((u, \sigma), \phi) \in \mathbb{V} \times H(\operatorname{div}, \Omega)$ with $\mathbb{V} = L^2(\Omega) \times H_0(\operatorname{div}, \Omega)$ such that

$$\begin{aligned} a((u, \sigma), (v, \tau)) + b((v, \tau), \phi) &= \ell(v), & \forall (v, \tau) \in \mathbb{V}, \\ b((u, \sigma), \psi) &= 0, & \forall \psi \in H(\operatorname{div}, \Omega). \end{aligned}$$

In this case, this formulation is not well-posed as the inf-sup condition (14) does not hold due to the fact that $\sigma \in H_0(\operatorname{div}, \Omega)$ and $\phi \in H(\operatorname{div}, \Omega)$. It is not possible to prove the inf-sup condition as $H_0(\operatorname{div}, \Omega)$ is a proper subset of $H(\operatorname{div}, \Omega)$. This problem is avoided if clamped boundary conditions are combined with simply supported boundary conditions as in [18].

A similar issue exists for the well-known Ciarlet–Raviart formulation [12, 2].

4 Finite element discretisation

Let $\mathcal{T}_h$ be a shape-regular partition of the domain Ω in simplices having the mesh-size h . Note that for $d = 2$ a simplex is a triangle, and for $d = 3$ it is a tetrahedron. In

the following, we use a positive generic constant C , which may take different values at different places but is always independent of the mesh-size h . Let $\mathcal{P}_k(T)$ be the space of polynomials of degree $k \geq 0$ in the simplex T . We consider the following finite dimensional subspaces U_h and $\mathbf{M}_h$ based on the triangulation $\mathcal{T}_h$ of the Hilbert spaces U and $\mathbf{M}$, respectively as follows:

$$U_h := \{u_h \in U : u_h|_T \in \mathcal{P}_k(T), \quad \forall T \in \mathcal{T}_h\},$$

$$\mathbf{M}_h := \{\phi_h \in \mathbf{M} : \phi_h|_T \in [\mathcal{P}_k(T)]^d + x \mathcal{P}_k(T), \quad \forall T \in \mathcal{T}_h\},$$

where $x \in \mathbb{R}^d$ is the space coordinate vector. Here $\mathbf{M}_h$ is the Raviart–Thomas space of order k [5, 4]. Let $\mathbb{V}_h := U_h \times \mathbf{M}_h$. The finite element problem is to find $((u_h, \sigma_h), \phi_h) \in \mathbb{V}_h \times \mathbf{M}_h$ such that

$$a((u_h, \sigma_h), (v_h, \tau_h)) + b((v_h, \tau_h), \phi_h) = \ell(v_h), \quad \forall (v_h, \tau_h) \in \mathbb{V}_h, \quad (15a)$$

$$b((u_h, \sigma_h), \psi_h) = 0 \quad \forall \psi_h \in \mathbf{M}_h. \quad (15b)$$

Now we prove the well-posedness of the discrete formulation as in the continuous setting. The continuity of both bilinear forms $a(\cdot, \cdot)$ and $b(\cdot, \cdot)$, and the linear form $\ell(\cdot)$ follows as in the continuous setting as we use conforming spaces. To prove the inf-sup condition for the bilinear form $b(\cdot, \cdot)$, we choose $v_h = \operatorname{div} \psi_h$ and $\tau_h = \psi_h$ for all $\psi_h \in \mathbf{M}_h$ as in the continuous setting to get

$$\sup_{(v_h, \tau_h) \in U_h \times \mathbf{M}_h} \frac{b((v_h, \tau_h), \psi_h)}{\|(v_h, \tau_h)\|_{\mathbb{V}}} = \sup_{(v_h, \tau_h) \in U_h \times \mathbf{M}_h} \frac{b((v_h, \tau_h), \psi_h)}{\sqrt{\|v_h\|_{0,\Omega}^2 + \|\tau_h\|_{\operatorname{div},\Omega}^2}} \geq \frac{1}{\sqrt{2}} \|\psi_h\|_{\operatorname{div},\Omega}.$$

Now we turn our attention to prove the coercivity of the bilinear form $a(\cdot, \cdot)$ on the kernel space $\mathcal{V}_h$ defined by

$$\mathcal{V}_h := \{(v_h, \tau_h) \in U_h \times \mathbf{M}_h : b((v_h, \tau_h), \psi_h) = 0, \quad \forall \psi_h \in \mathbf{M}_h\}.$$

Let $(v_h, \tau_h) \in \mathcal{V}_h$ so that

$$\int_{\Omega} \tau_h \cdot \psi_h \, dx + \int_{\Omega} v_h \operatorname{div} \psi_h \, dx = 0, \quad \forall \psi_h \in \mathbf{M}_h. \quad (16)$$

We choose $\psi_h \in \mathbf{M}_h$ as a solution of the divergence equation (see, e.g., [4])

$$\operatorname{div} \psi_h = v_h$$

with the property

$$\|\psi_h\|_{0,\Omega} \leq C \|v_h\|_{0,\Omega},$$

in (16) and get

$$\|v_h\|_{0,\Omega}^2 = - \int_{\Omega} \tau_h \cdot \psi_h \, dx \leq \|\tau_h\|_{0,\Omega} \|\psi_h\|_{0,\Omega} \leq C \|\tau_h\|_{0,\Omega} \|v_h\|_{0,\Omega}.$$

This gives us

$$\|v_h\|_{0,\Omega} \leq C \|\tau_h\|_{0,\Omega}. \quad (17)$$

Choosing $\psi_h = \tau_h$, we have

$$\|\tau_h\|_{0,\Omega}^2 = - \int_{\Omega} v_h \operatorname{div} \tau_h \, dx.$$

This yields

$$\|\tau_h\|_{0,\Omega}^2 \leq \|v_h\|_{0,\Omega} \|\operatorname{div} \tau_h\|_{0,\Omega}. \quad (18)$$

Combining (17) with (18), we get

$$\|\tau_h\|_{0,\Omega} \leq C \|\operatorname{div} \tau_h\|_{0,\Omega}. \quad (19)$$

Hence, from (19) we have the coercivity result

$$a((v_h, \tau_h), (v_h, \tau_h)) = \|\operatorname{div} \tau_h\|_{0,\Omega}^2 \geq C \|\tau_h\|_{\operatorname{div},\Omega}^2 + \|v_h\|_{0,\Omega}^2, \quad \forall (v_h, \tau_h) \in \mathcal{V}_h.$$

The following theorem for the a priori error estimate follows from the theory of mixed finite elements [8].

Theorem 1. *There exists a unique solution $((u_h, \sigma_h), \phi_h) \in \mathbb{V}_h \times \mathbf{M}_h$ to the discrete saddle-point problem (15). Moreover, we have that*

$$\|u_h\|_{0,\Omega} + \|\sigma_h\|_{\operatorname{div},\Omega} + \|\phi_h\|_{\operatorname{div},\Omega} \leq C \|f\|_{0,\Omega},$$

and for the solution $((u, \sigma), \phi) \in \mathbb{V} \times \mathbf{M}$ of the saddle point problem (8), we have

$$\begin{aligned} & \|u - u_h\|_{0,\Omega} + \|\sigma - \sigma_h\|_{\operatorname{div},\Omega} + \|\phi - \phi_h\|_{\operatorname{div},\Omega} \\ & \leq C \left(\inf_{v_h \in U_h} \|u - v_h\|_{0,\Omega} + \inf_{\tau_h \in \mathbf{M}_h} \|\sigma - \tau_h\|_{\operatorname{div},\Omega} + \inf_{\psi_h \in \mathbf{M}_h} \|\phi - \psi_h\|_{\operatorname{div},\Omega} \right). \end{aligned}$$

Moreover, if $u \in H^{k+1}(\Omega)$, $\sigma, \phi \in [H^{k+1}(\Omega)]^d$ and $\operatorname{div} \sigma, \operatorname{div} \phi \in H^{k+1}(\Omega)$, we have

$$\begin{aligned} & \|u - u_h\|_{0,\Omega} + \|\sigma - \sigma_h\|_{\operatorname{div},\Omega} + \|\phi - \phi_h\|_{\operatorname{div},\Omega} \\ & \leq Ch^{k+1} (\|u\|_{k+1,\Omega} + \|\sigma\|_{k+1,\Omega} + \|\operatorname{div} \sigma\|_{k+1,\Omega} + \|\phi\|_{k+1,\Omega} + \|\operatorname{div} \phi\|_{k+1,\Omega}). \end{aligned}$$

5 Extended Fisher–Kolmogorov equation

In this section, we apply our mixed formulation to the following time-dependent fourth-order extended Fisher–Kolmogorov equation

$$\partial_t u + \gamma \Delta^2 u - \Delta u + g(u) = f \quad \text{in } J \times \Omega, \quad (20a)$$

$$u(x, 0) = u_0(x) \quad \text{in } \Omega, \quad (20b)$$

where the time interval is $J := (0, T]$ and the nonlinear term is of the form $g(u) := u^3 - u$. The positive parameter γ controls the energetic penalty for curvature (bending) of u , acting as a higher-order diffusion that suppresses small-scale structure and introduces an intrinsic length scale (see, e.g., [14, 30]). Applying the mixed formulation for the biharmonic problem introduced earlier, we get the following time-dependent saddle point problem: For every $t > 0$, find $((u(t), \sigma(t)), \phi(t)) \in \mathbb{V} \times \mathbf{M}$ such that

$$\begin{aligned} (\partial_t u(t), v)_{0,\Omega} + \gamma(a((u(t), \sigma(t)), (v, \tau)) + b((v, \tau), \phi(t))) \\ + c(\sigma(t), \tau) + (g(u(t)), v)_{0,\Omega} = \ell(v) \quad \forall (v, \tau) \in \mathbb{V}, \end{aligned} \quad (21a)$$

$$b((u(t), \sigma(t)), \psi) = 0 \quad \forall \psi \in \mathbf{M} \quad (21b)$$

with $u(\cdot, 0) = u_0(x)$. From now on, and whenever clear from the context, we will drop the notation (t) for the trial functions. Recall the bilinear forms $a(\cdot, \cdot)$ and $b(\cdot, \cdot)$ from (9). We denote the usual L^2 -inner product by $(\cdot, \cdot)_{0,\Omega}$, and define the bilinear form

$$c(\sigma, \tau) := \int_{\Omega} \sigma \cdot \tau \, dx.$$

Since $g(u) = u^3 - u$ is a locally Lipschitz continuous function, there exists a unique solution to (21) for a finite time $T > 0$ [29].

We use the following shorthand notation:

$$\|\bullet\|_{L^p(J;*)}^p := \int_J \|\bullet(s)\|_*^p ds \quad \text{for } p \in [1, \infty), \quad \|\bullet\|_{L^\infty(\bar{J};*)} := \sup_{s \in \bar{J}} \|\bullet(s)\|_*,$$

where the (seminorm) $\|\cdot\|_*$ depends on the context.

Lemma 3. *The following stability estimate holds:*

$$\frac{1}{2} \|u\|_{L^\infty(\bar{J}; L^2(\Omega))}^2 + \gamma \|\operatorname{div} \sigma\|_{L^2(J; L^2(\Omega))}^2 + \|\sigma\|_{L^2(J; L^2(\Omega))}^2 \lesssim \|u_0\|_{0,\Omega}^2 + \|f\|_{L^2(J; L^2(\Omega))}^2.$$

Proof. Choosing $v = u$, $\tau = \sigma$ and $\psi = \phi$ and using $b((u, \sigma), \phi) = 0$, we get

$$\begin{aligned} \frac{1}{2} \frac{d}{dt} \|u\|_{0,\Omega}^2 + \gamma \|\operatorname{div} \sigma\|_{0,\Omega}^2 + \|\sigma\|_{0,\Omega}^2 &= \ell(u) - (g(u), u)_{0,\Omega} \\ &= (f, u)_{0,\Omega} - \|u\|_{0,\Omega}^2 + \|u\|_{0,\Omega}^2 \\ &\leq \frac{1}{2} \|f\|_{0,\Omega}^2 + \frac{3}{2} \|u\|_{0,\Omega}^2, \end{aligned}$$

with the definition of $g(u) = u^3 - u$ in the second step and the Cauchy–Schwarz inequality followed by the Young inequality in the last step. Invoking Gronwall’s lemma, we conclude the proof.

This stability result and the local existence implies the global existence of the unique solution to (21). The corresponding finite element problem is to find, for all $t > 0$, $((u_h(t), \sigma_h(t)), \phi_h(t)) \in \mathbb{V}_h \times \mathbf{M}_h$ such that

$$(\partial_t u_h, v_h)_{0,\Omega} + \gamma(a((u_h, \sigma_h), (v_h, \tau_h)) + b((v_h, \tau_h), \phi_h)) \quad (22a)$$

$$\begin{aligned} + c(\sigma_h, \tau_h) + (g(u_h), v_h)_{0,\Omega} &= \ell(v_h) \quad \forall (v_h, \tau_h) \in \mathbb{V}_h, \\ b((u_h, \sigma_h), \psi_h) &= 0 \quad \forall \psi_h \in \mathbf{M}_h \end{aligned} \quad (22b)$$

with $u_h(\cdot, 0) = P_h u_0(x)$, where P_h is the standard L^2 -projection, that is, for all $v_h \in U_h$,

$$(v - P_h v, v_h)_{0,\Omega} = 0 \quad \forall v_h \in U_h. \quad (23)$$

The existence and uniqueness of the solution u_h follows analogously as in the continuous problem. In the following, we present the error analysis for the above semi-discrete formulation (22). For our numerical results, time discretisation is done with backward Euler's scheme.

Let us recall that if $v \in H^k(\Omega)$, then the following approximation property holds:

$$\|v - P_h v\|_{0,\Omega} \lesssim h^k |v|_{H^k(\Omega)}.$$

Similarly, let $P_h : \mathbf{M} \rightarrow \mathbf{M}_h$ be the vector-valued L^2 -projection. Let $F_h : \mathbf{M} \rightarrow \mathbf{M}_h$ be the classical Fortin interpolation operator satisfying the following commutative property (see, e.g., [4]): For all $\psi \in \mathbf{M}$,

$$\operatorname{div} F_h \psi = P_h(\operatorname{div} \psi).$$

This provides the orthogonality property

$$(\operatorname{div} \psi - \operatorname{div} F_h \psi, v_h)_{0,\Omega} = 0 \quad \forall v_h \in U_h. \quad (24)$$

Next, for all $\tau \in [H^{k+1}(\Omega)]^d$ with $\operatorname{div} \tau \in H^{k+1}(\Omega)$, we have the following properties (see, e.g., [4])

$$\|\tau - P_h \tau\|_{0,\Omega} + \|\tau - F_h \tau\|_{0,\Omega} \lesssim h^{k+1} |\tau|_{[H^{k+1}(\Omega)]^d}, \quad (25a)$$

$$\|\operatorname{div}(\tau - P_h \tau)\|_{0,\Omega} + \|\operatorname{div}(\tau - F_h \tau)\|_{0,\Omega} \lesssim h^{k+1} |\operatorname{div} \tau|_{H^{k+1}(\Omega)}. \quad (25b)$$

We define the errors as

$$\begin{aligned} u - u_h &= (u - P_h u) + (P_h u - u_h) =: \rho_u + \theta_u, \\ \sigma - \sigma_h &= (\sigma - P_h \sigma) + (P_h \sigma - \sigma_h) =: \rho_\sigma + \theta_\sigma, \\ \phi - \phi_h &= (\phi - F_h \phi) + (F_h \phi - \phi_h) =: \rho_\phi + \theta_\phi. \end{aligned}$$

Theorem 2. *The following error estimate holds:*

$$\begin{aligned}
& \|\theta_u\|_{L^\infty(\bar{J}; L^2(\Omega))}^2 + \gamma \|\operatorname{div} \theta_\sigma\|_{L^2(J; L^2(\Omega))}^2 + \|\theta_\sigma\|_{L^2(\cdot; L^2(\Omega))}^2 \\
& \lesssim \|\partial_t \rho_u\|_{L^2(J; L^2(\Omega))}^2 + \|\rho_u\|_{L^2(J; L^2(\Omega))}^2 + \gamma \|\operatorname{div} \rho_\sigma\|_{L^2(J; L^2(\Omega))}^2 \\
& \quad + \|\rho_\sigma\|_{L^2(J; L^2(\Omega))}^2 + \|\rho_\phi\|_{L^2(J; L^2(\Omega))}^2.
\end{aligned}$$

Proof. Testing the continuous problem (21) against $(v, \tau) := (v_h, \tau_h)$ and subtracting (22) from (21), we get the following error equations

$$\begin{aligned}
& (\partial_t(u - u_h), v_h)_{0, \Omega} + \gamma(a((u - u_h, \sigma - \sigma_h), (v_h, \tau_h)) \\
& + b((v_h, \tau_h), \phi - \phi_h)) + c(\sigma - \sigma_h, \tau_h) + (g(u) - g(u_h), v_h)_{0, \Omega} = 0, \quad (26a)
\end{aligned}$$

$$b((u - u_h, \sigma - \sigma_h), \psi_h) = 0, \quad (26b)$$

for all $(v_h, \tau_h) \in \mathbb{V}_h$ and all $\psi_h \in \mathbf{M}_h$. Since $\operatorname{div} \psi_h \in U_h$, the L^2 -orthogonality (23) implies that

$$b((u - P_h u, \sigma - P_h \sigma), \psi_h) = (\sigma - P_h \sigma, \psi_h)_{0, \Omega} + (u - P_h u, \operatorname{div} \psi_h)_{0, \Omega} = 0,$$

for all $\psi_h \in \mathbf{M}_h$. This in (26b) provides that $b((\theta_u, \theta_\sigma), \psi_h) = 0$ for all $\psi_h \in \mathbf{M}_h$. Invoking this, using the error decompositions, and choosing $(v_h, \tau_h) = (\theta_u, \theta_\sigma)$ and $\psi_h = \theta_\phi$, we arrive at

$$\begin{aligned}
& \frac{1}{2} \frac{d}{dt} \|\theta_u\|_{0, \Omega}^2 + \gamma \|\operatorname{div} \theta_\sigma\|_{0, \Omega}^2 + \|\theta_\sigma\|_{0, \Omega}^2 = -(\partial_t \rho_u, \theta_u)_{0, \Omega} - \gamma(\operatorname{div} \rho_\sigma, \operatorname{div} \theta_\sigma)_{0, \Omega} \\
& \quad + b((\theta_u, \theta_\sigma), \rho_\phi) - (\rho_\sigma, \theta_\sigma)_{0, \Omega} - (g(u) - g(u_h), \theta_u)_{0, \Omega}. \quad (27)
\end{aligned}$$

The orthogonalities (23) and (24) lead to $(\partial_t \rho_u, \theta_u)_{0, \Omega} = 0$, and $b((\theta_u, \theta_\sigma), \rho_\phi) = (\theta_\sigma, \rho_\phi)_{0, \Omega}$. The definition of the nonlinear term g and the Young inequality show that

$$\begin{aligned}
\|g(u) - g(u_h)\|_{0, \Omega} & \leq \|u - u_h\|_{0, \Omega} \|u^2 + uu_h + u_h^2 - 1\|_{\infty, \Omega} \\
& \leq C_L \|u - u_h\|_{0, \Omega} \leq C_L (\|\rho_u\|_{0, \Omega} + \|\theta_u\|_{0, \Omega}),
\end{aligned}$$

where we used the Sobolev embedding result $H^2(\Omega) \hookrightarrow L^\infty(\Omega)$ and the regularity estimate for both u and u_h in the second step, and the triangle inequality in the last step. The previous displayed estimate and the Young inequality in (27) prove that

$$\begin{aligned}
& \frac{1}{2} \frac{d}{dt} \|\theta_u\|_{0, \Omega}^2 + \frac{\gamma}{2} \|\operatorname{div} \theta_\sigma\|_{0, \Omega}^2 + \frac{1}{2} \|\theta_\sigma\|_{0, \Omega}^2 \\
& \leq \frac{1}{2} \|\partial_t \rho_u\|_{0, \Omega}^2 + \frac{\gamma}{2} \|\operatorname{div} \rho_\sigma\|_{0, \Omega}^2 + \|\rho_\phi\|_{0, \Omega}^2 + \|\rho_\sigma\|_{0, \Omega}^2 + C_L \|\rho_u\|_{0, \Omega}^2 + C \|\theta_u\|_{0, \Omega}^2.
\end{aligned}$$

Integrating from 0 to t and invoking Gronwall lemma, we conclude the proof.

6 Numerical results

This section presents a series of numerical experiments illustrating the performance of the proposed mixed formulation for the extended Fisher–Kolmogorov problem (20). All tests are carried out using exact solutions in closed form so that the corresponding forcing term and boundary conditions can be manufactured. We consider two different types of boundary conditions: the simply supported case and the Cahn–Hilliard case.

The spatial discretisation employs Raviart–Thomas spaces of order $k = 0, 1$ for the flux variables σ and ϕ , coupled with piecewise polynomial approximations of compatible degree for the remaining unknown u in the mixed system. We consider a sequence of uniformly refined meshes of Ω with mesh-size h . Errors are reported in the natural $H(\text{div})$ -norm associated with the mixed formulation, and, in addition, in the L^2 -norm for the biharmonic solution u , all at the final time step. The discretisation in time is done with backward Euler’s scheme, utilising a small constant time step so that the total error is dominated by the spatial error.

Let $e(h)$ denote the computed error associated with the solution u , the gradient σ or the Lagrange multiplier ϕ on a mesh with size h . The experimental order of convergence (EOC) in space between two meshes of sizes h_1 and h_2 ($h_2 < h_1$) is defined by

$$\text{EOC}(h_1, h_2) = \frac{\log(e(h_1)/e(h_2))}{\log(h_1/h_2)}.$$

We also recall that when reporting EOCs in the tables, we follow the convention that a rate of r indicates the error behaves like

$$e(h) = \mathcal{O}(h^r).$$

For the case of Cahn–Hilliard boundary conditions, the zero-mean constraint for u is imposed with a real Lagrange multiplier requiring to add two terms in the left-hand side system.

The first set of tests corresponds to the simply supported case and on the unit square domain $\Omega = (0, 1)^2$ and the time domain $[0, 0.1]$ with the time step $\Delta t = 0.01$. The manufactured solution

$$u = t \sin(\pi x) \sin(\pi y)$$

is chosen so that the solution is sufficiently smooth, ensuring that the theoretical convergence rates are attainable, and it also satisfies the simply supported boundary conditions. Note that in this case we take the non-homogeneous version of the extended Fisher–Kolmogorov equation and the corresponding source term is computed from the manufactured solutions. Table 1 displays the error history (individual errors and estimated rates of convergence) for RT_0 and RT_1 , respectively. The results confirm the theoretical error estimates. For RT_0 we observe first-order convergence

Table 1 Convergence for the Fisher–Kolmogorov equation at the final time $T = 0.1$, against manufactured solutions for different polynomial degrees in the 2D case with simply supported boundary conditions. Here we set $\gamma = 1$. The symbol $\star$ here, and in the tables below, indicates that no convergence rate has been computed for the coarsest mesh refinement.

Dof	h	$e(u)$	EOC	$e(\sigma)$	EOC	$e(\phi)$	EOC
Ultra-weak scheme with $k = 0$							
40	0.7071	2.72e-02	$\star$	5.42e-01	$\star$	1.07e+01	$\star$
144	0.3536	1.42e-02	0.936	2.85e-01	0.927	5.61e+00	0.936
544	0.1768	7.18e-03	0.987	1.44e-01	0.982	2.84e+00	0.981
2112	0.0884	3.60e-03	0.997	7.23e-02	0.996	1.43e+00	0.995
8320	0.0442	1.80e-03	0.999	3.62e-02	0.999	7.14e-01	0.999
33024	0.0221	9.00e-04	1.000	1.81e-02	1.000	3.57e-01	1.000
Ultra-weak scheme with $k = 1$							
120	0.7071	8.19e-03	$\star$	1.62e-01	$\star$	3.19e+00	$\star$
448	0.3536	2.15e-03	1.931	4.28e-02	1.919	8.44e-01	1.916
1728	0.1768	5.45e-04	1.979	1.09e-02	1.978	2.14e-01	1.977
6784	0.0884	1.37e-04	1.995	2.73e-03	1.994	5.38e-02	1.994
26880	0.0442	3.42e-05	1.999	6.82e-04	1.999	1.35e-02	2.000
107008	0.0221	8.63e-06	1.986	1.72e-04	1.986	3.01e-03	2.013

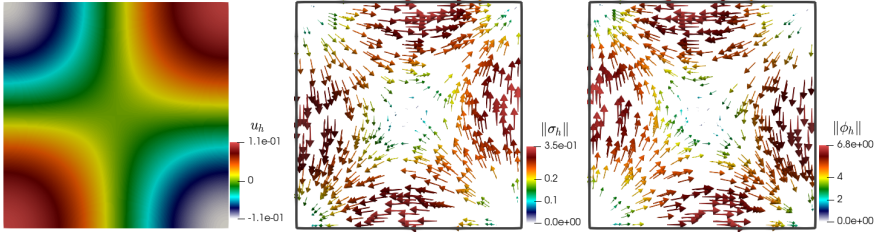


Fig. 1 Approximate solutions for the Fisher–Kolmogorov problem at time $T = 0.1$, in 2D using Cahn–Hilliard boundary conditions. The results correspond to the second-order mixed scheme.

in the energy norm while for RT_1 , the convergence rates increase to second order. In all cases the asymptotic regime is reached rapidly, and the computed orders of convergence match the approximation properties of the finite element spaces.

The second set of experiments considers the Cahn–Hilliard boundary conditions, also in the unit square domain. The manufactured solution to the extended Fisher–Kolmogorov problem is now

$$u = t \cos(\pi x) \cos(\pi y),$$

and it is used to prescribe the data as well as the exact mixed variables. The corresponding error history is reported in Table 2, and sample solutions for the scheme with $k = 1$ and on a fine mesh are depicted at time $T = 0.1$ in Figure 1.

Next, we also show spatial convergence in the 3D case, taking the unit cube domain $\Omega = (0, 1)^3$ and considering the manufactured solution

Table 2 Convergence for the extended Fisher–Kolmogorov equation at the final time $T = 0.1$, against manufactured solutions for different polynomial degrees in the 2D case with Cahn–Hilliard boundary conditions. Here we set $\gamma = 1$.

Dof	h	$e(u)$	EOC	$e(\sigma)$	EOC	$e(\phi)$	EOC
Ultra-weak scheme with $k = 0$							
41	0.7071	2.72e-02	★	5.45e-01	★	1.08e+01	★
145	0.3536	1.43e-02	0.928	2.86e-01	0.931	5.62e+00	0.938
545	0.1768	7.19e-03	0.991	1.44e-01	0.985	2.85e+00	0.981
2113	0.0884	3.60e-03	0.998	7.23e-02	0.996	1.43e+00	0.995
8321	0.0442	1.80e-03	1.000	3.62e-02	0.999	7.14e-01	0.999
33025	0.0221	9.00e-04	1.000	1.81e-02	1.000	3.57e-01	1.000
Ultra-weak scheme with $k = 1$							
121	0.7071	8.24e-03	★	1.63e-01	★	3.21e+00	★
449	0.3536	2.15e-03	1.937	4.29e-02	1.928	8.46e-01	1.923
1729	0.1768	5.45e-04	1.982	1.09e-02	1.981	2.15e-01	1.980
6785	0.0884	1.37e-04	1.995	2.73e-03	1.995	5.38e-02	1.995
26881	0.0442	3.42e-05	1.999	6.82e-04	1.999	1.33e-02	2.020
107009	0.0221	7.37e-06	1.997	1.76e-04	1.995	3.02e-03	2.014

Table 3 Convergence against manufactured solutions in 3D and using simply supported boundary conditions. Errors computed at the final time $T = 0.01$.

Dof	h	$e(u)$	EOC	$e(\sigma)$	EOC	$e(\phi)$	EOC
Ultra-weak scheme with $k = 0$							
42	1.7321	2.90e-03	★	8.26e-02	★	3.15e+00	★
288	0.8660	1.80e-03	0.693	5.38e-02	0.619	1.65e+00	0.938
2112	0.4330	9.60e-04	0.904	2.88e-02	0.901	8.55e-01	0.945
16128	0.2165	4.88e-04	0.975	1.47e-02	0.974	4.34e-01	0.977
125952	0.1083	2.45e-04	0.994	7.36e-03	0.994	2.18e-01	0.994
995328	0.0541	1.23e-04	0.998	3.69e-03	0.998	1.09e-01	0.998
Ultra-weak scheme with $k = 1$							
168	1.7321	2.08e-03	★	6.07e-02	★	2.15e+00	★
1200	0.8660	6.36e-04	1.708	1.89e-02	1.682	5.70e-01	1.913
9024	0.4330	1.73e-04	1.880	5.16e-03	1.872	1.53e-01	1.898
69888	0.2165	4.42e-05	1.967	1.32e-03	1.966	3.91e-02	1.968
549888	0.1083	1.11e-05	1.992	3.32e-04	1.991	9.84e-03	1.991
4362240	0.0541	2.78e-06	1.998	8.32e-05	1.998	2.46e-03	1.998

$$u = t \sin(\pi x) \sin(\pi y) \sin(\pi z).$$

For conciseness we only show the case of simply supported boundary conditions, and take the time interval $[0, 0.01]$, $\Delta t = 0.001$, and $\gamma = 0.01$. The convergence is reported in Table 3, while we also show samples of approximate primal and mixed variables in Figure 2.

The observed convergence rates are in full agreement with the theoretical predictions from Theorem 1. For both polynomial degrees, the optimal error decay of $O(h^{k+1})$ is obtained in all norms. This demonstrates that the proposed mixed formulation is robust with respect to the type of boundary conditions imposed and works in both 2D and 3D.

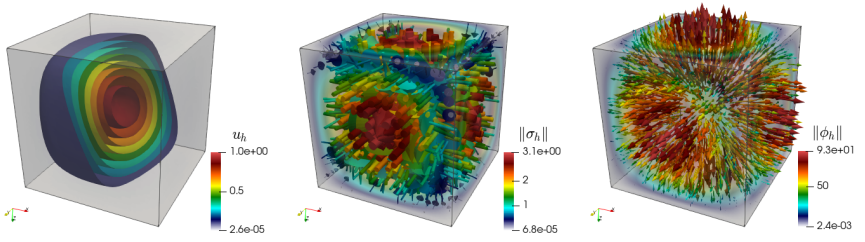


Fig. 2 Approximate solutions for the biharmonic problem in 3D using simply supported boundary conditions. The results correspond to the lowest-order mixed scheme.

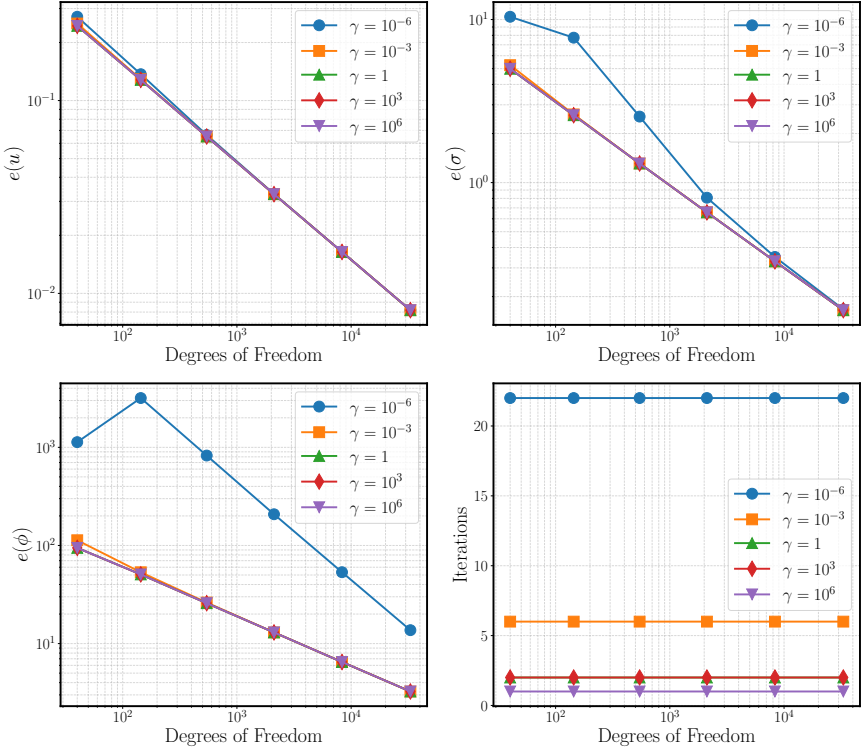


Fig. 3 Performance (error history and number of Newton iterations to converge) of the mixed finite element scheme for the extended Fisher–Kolmogorov problem, taking different values of the model parameter γ .

It is also important to address the dependence of the formulation on the values of the parameter γ . We perform a simple parametric study, taking as base-line case simply supported boundary conditions, the unit square domain, the time domain $[0, 1]$ and $\Delta t = 1$ (that is, we only do one time step). The plot in Figure 3 shows the error decay for each unknown and number of required Newton iterations for the convergence of the finite element scheme for different values of γ . We observe that

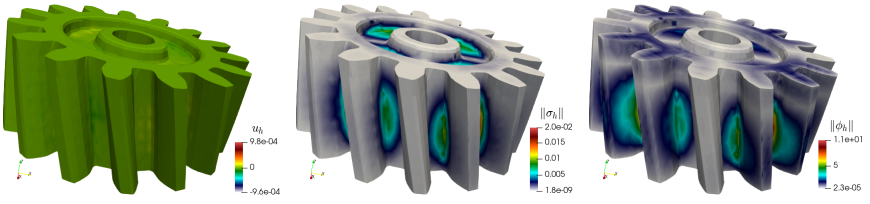


Fig. 4 Numerical solution of the extended Fisher–Kolmogorov equation on a gear model at $T = 0.5$. Potential, gradient, and Lagrange multiplier obtained with the second-order scheme.

the convergence of the primal variable is essentially unaffected by the choice of γ , with optimal convergence rates attained for all values considered except $\gamma = 10^{-6}$. In this extreme case, the Jacobian matrix becomes nearly rank-deficient because the off-diagonal blocks associated with the bilinear form b become negligible. This deterioration primarily affects the approximation of the Lagrange multiplier, while the convergence of the primal variable remains essentially unchanged. We also observe that the convergence of the nonlinear solver becomes more challenging as the value of γ decreases.

Finally, we perform a simulation of the extended Fisher–Kolmogorov equation with simply supported boundary conditions on a 3D geometry of a gear. The time interval is $[0, 0.5]$ and the constant time step is $\Delta t = 0.1$. This can be considered as the 3D extension of the 2D gear domain convergence tests done for the same equation (in primal form and using generalised finite difference schemes) in [21, Case 2].

The initial condition is taken as the solution of the steady problem with source term $f(x, y, z) = 100 \sin(2\pi x) \sin(2\pi y) \sin(3\pi z)$, and homogeneous simply supported boundary conditions. The simulation is performed up to the final time $T = 0.5$ with constant time step $\Delta t = 0.1$. We use the parameter $\gamma = 1$ and take the second-order scheme with $k = 1$, which gives for this mesh resolution a total of 694280 degrees of freedom. The numerical solutions are displayed in Figure 4, showing smooth concentration of potential near the centre of the gear.

Acknowledgements The work was started when B. P. Lamichhane visited Monash University in 2023. He gratefully acknowledges Monash University for their hospitality. Part of this work was completed when all authors met in a MATRIX workshop at Creswick in May, 2025. We gratefully acknowledge the support from the MATRIX Institute. This work has been also supported by the Australian Research Council through the Future Fellowship grant FT220100496.

References

1. Adams, R.: Sobolev Spaces. Academic Press New York (1975)

2. Babuška, I., Osborn, J., Pitkäranta, J.: Analysis of mixed methods using mesh dependent norms. *Mathematics of Computation* **35**, 1039–1062 (1980)
3. Banz, L., Lamichhane, B.P., Stephan, E.P.: A new three-field formulation of the biharmonic problem and its finite element discretization. *Numerical Methods for Partial Differential Equations* **33**(1), 199–217 (2017)
4. Boffi, D., Brezzi, F., Fortin, M.: *Mixed finite element methods and applications*. Springer–Verlag (2013)
5. Braess, D.: *Finite Elements. Theory, fast solver, and applications in solid mechanics*. Cambridge Univ. Press, Second Edition (2001)
6. Brenner, S., Scott, L.: *The Mathematical Theory of Finite Element Methods*. Springer–Verlag, New York (1994)
7. Brenner, S., Sung, L.Y.: C^0 interior penalty methods for fourth order elliptic boundary value problems on polygonal domains. *Journal of Scientific Computing* **22–23**, 83 – 118 (2005)
8. Brezzi, F., Fortin, M.: *Mixed and hybrid finite element methods*. Springer–Verlag, New York (1991)
9. Cheng, X., Han, W., Huang, H.: Some mixed finite element methods for biharmonic equation. *Journal of Computational and Applied Mathematics* **126**, 91–109 (2000)
10. Ciarlet, P.: *The Finite Element Method for Elliptic Problems*. North Holland, Amsterdam (1978)
11. Ciarlet, P., Glowinski, R.: Dual iterative techniques for solving a finite element approximation of the biharmonic equation. *Computer Methods in Applied Mechanics and Engineering* **5**, 277–295 (1975)
12. Ciarlet, P., Raviart, P.: A mixed finite element method for the biharmonic equation. In: C.D. Boor (ed.) *Symposium on Mathematical Aspects of Finite Elements in Partial Differential Equations*, pp. 125–143. Academic Press, New York (1974)
13. Davini, C., Pitacco, I.: An unconstrained mixed method for the biharmonic problem. *SIAM Journal on Numerical Analysis* **38**, 820–836 (2001)
14. Dee, G., van Saarloos, W.: Bistable systems with propagating fronts leading to pattern formation. *Physical Review Letters* **60**(25), 2641 (1988)
15. Engel, G., Garikipati, K., Hughes, T., Larson, M., Mazzei, L., Taylor, R.: Continuous/discontinuous finite element approximations of fourth-order elliptic problems in structural and continuum mechanics with applications to thin beams and plates, and strain gradient elasticity. *Computer Methods in Applied Mechanics and Engineering* **191**, 3669–3750 (2002)
16. Falk, R.: Approximation of the biharmonic equation by a mixed finite element method. *SIAM Journal on Numerical Analysis* **15**, 556–567 (1978)
17. Falk, R., Osborn, J.: Error estimates for mixed methods. *RAIRO Anal. Numér.* **14**, 249–277 (1980)
18. Farrell, P.E., Hamdan, A., MacLachlan, S.P.: A new mixed finite-element method for H^2 elliptic problems. *Computers & Mathematics with Applications* **128**, 300–319 (2022)
19. Girault, V., Raviart, P.A.: *Finite Element Methods for Navier-Stokes Equations*. Springer–Verlag, Berlin (1986)
20. Johnson, C., Pitkäranta, J.: Some mixed finite element methods related to reduced integration. *Mathematics of Computation* **38**, 375–400 (1982)
21. Ju, B., Sun, W., Qu, W., Gu, Y.: Analysis of extended Fisher-Kolmogorov equation in 2D utilizing the generalized finite difference method with supplementary nodes. *CMES-Computer Modeling in Engineering & Sciences* **141**(1) (2024)
22. Lamichhane, B.: A mixed finite element method for the biharmonic problem using biorthogonal or quasi-biorthogonal systems. *Journal of Scientific Computing* **46**, 379–396 (2011)
23. Lamichhane, B.: A stabilized mixed finite element method for the biharmonic equation based on biorthogonal systems. *Journal of Computational and Applied Mathematics* **235**, 5188–5197 (2011)
24. Lions, J.L., Magenes, E.: *Non-homogeneous boundary value problems and applications*. Vol. I. Springer–Verlag, New York (1972). Translated from the French by P. Kenneth, *Die Grundlehren der mathematischen Wissenschaften, Band 181*

25. Mardal, K., Tai, X.C., Winther, R.: A robust finite element method for Darcy–Stokes flow. *SIAM Journal on Numerical Analysis* **40**, 1605–1631 (2002)
26. Monk, P.: A mixed finite element method for the biharmonic equation. *SIAM Journal on Numerical Analysis* **24**, 737–749 (1987)
27. Morley, L.S.D.: The triangular equilibrium element in the solution of plate bending problems. *Aeronautical Quarterly* **19**(2), 149–169 (1968)
28. Pacheco, D.R., Steinbach, O.: Optimal pressure recovery using an ultra-weak finite element method for the pressure Poisson equation and a least-squares approach for the gradient equation. *Computational Methods in Applied Mathematics* **24**(4), 921–934 (2024)
29. Pazy, A.: Semigroups of linear operators and applications to partial differential equations, vol. 44. Springer Science & Business Media (2012)
30. Peletier, L.A., Troy, W.C.: Spatial patterns described by the extended Fisher–Kolmogorov equation: Periodic solutions. *SIAM Journal on Mathematical Analysis* **28**(6), 1317–1353 (1997)
31. Wang, M., Xu, J.c., Hu, Y.c.: Modified morley element method for a fourth order elliptic singular perturbation problem. *Journal of Computational Mathematics* pp. 113–120 (2006)
32. Wells, G., Kuhl, E., Garikipati, K.: A discontinuous Galerkin method for the Cahn–Hilliard equation. *Journal of Computational Physics* **218**, 860 – 877 (2006)